



**OPUS Sp. z o. o.**  
ul. Toruńska 8, 44-122 Gliwice

+48 32 420 11 11  
kontakt@opus.pl  
opus.pl

Professional guillotine

## **Electric-hydraulic guillotine - IDEAL THE 68 LT**


Catalogue number: 000250



### **Description**

#### **Effortless positioning thanks to the air table.**

The innovative air table makes it much easier to position and move stacks of paper. Air is blown through small openings in the table top, creating an air cushion that minimizes the frictional resistance between the stack of paper and the table surface. This means that even large quantities of paper can be handled effortlessly and comfortably.

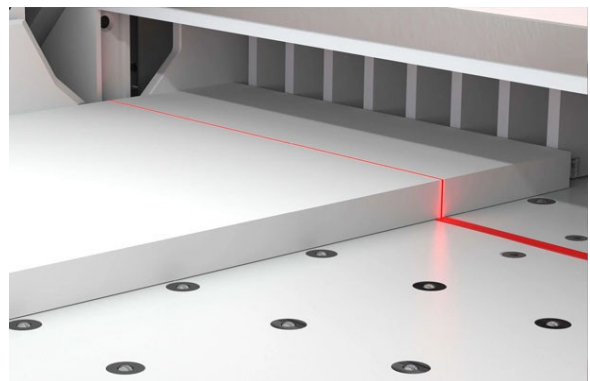





**IDEAL THE 68 LT - a new generation electric guillotine with hydraulic clamp drive.**

Designed for optimal, maximum efficiency and always safe work. It is an ideal solution for printing houses, small printing plants, advertising agencies, offices, digital printing houses, copy shops and wherever fast and precise cutting is needed. IDEAL has been operating since 1951, it is synonymous with reliability and the highest quality.

**Operation and control via a high-quality 15.6" touch screen.**

The intuitive software of the IDEAL THE 68 LT guillotine with comprehensive functions now at your fingertips. The easy-to-use, comfortable for your eyes display has a smooth tilt adjustment, perfectly adapts to lighting conditions and the ergonomic needs of the user.

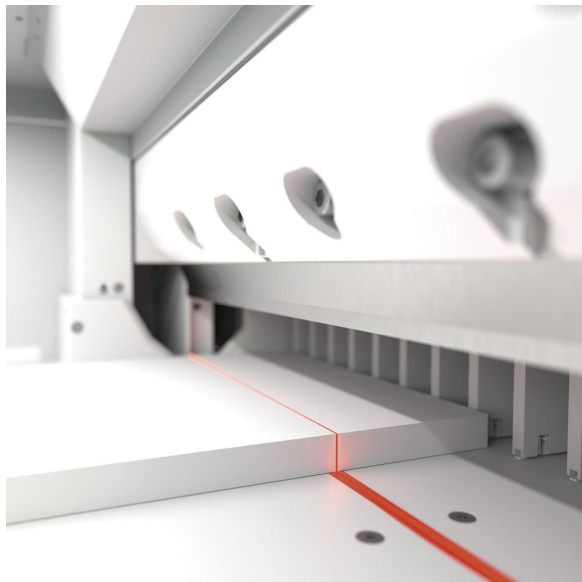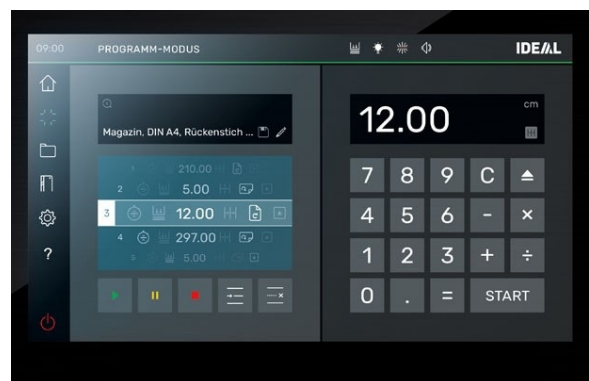

**The precision and quality of your paper guillotine matters!**

Clean edges with every cut, precision-bearing blade guide, electronically monitored false clamp plate, manual fine adjustment of the backgauge and optical cutting line display – all this guarantees a successful cut every time.

**Safety is, above all, work comfort for the cutter.**

The IDEAL THE 68 LT guillotine is equipped with the SCS (Safety Cutting System). This is a system that ensures complete safety during cutting, and includes: two-handed blade activation, infrared light beam safety curtain, safe blade replacement, blade depth adjustment and restricted access via password protection.



**Maximum adaptation to the needs of the paper guillotine operator.**

Adjustable table height, integrated function for exchanging cutting sticks, operator guidance via colour signals – many ergonomic functions needed in everyday work.

**THE new, even better series.**

- 40% faster clamping and cutting
- 50% higher maximum clamping pressure
- 100% faster backgauge
- PIN code restricted access



Parameters

|                           |                      |
|---------------------------|----------------------|
| Guillotine purpose        | for professional use |
| Brand                     | IDEAL                |
| Cutting length            | 680 mm               |
| Maximum cutting thickness | 80 mm                |
| Narrow cut                | 15 / 60 mm           |
| Table depth               | 680 mm               |

|                                                      |                                                                                                                                                                                                                                                                                                                                                        |
|------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Cutting knife work type                              | electromechanical                                                                                                                                                                                                                                                                                                                                      |
| Clamp drive                                          | hydraulic                                                                                                                                                                                                                                                                                                                                              |
| Cutting knife power                                  | 2300 W                                                                                                                                                                                                                                                                                                                                                 |
| Clamp drive power                                    | not applicable                                                                                                                                                                                                                                                                                                                                         |
| Backgauge power                                      | 100 W                                                                                                                                                                                                                                                                                                                                                  |
| Net weight                                           | 338 kg                                                                                                                                                                                                                                                                                                                                                 |
| Gross weight                                         | 364 kg                                                                                                                                                                                                                                                                                                                                                 |
| Height                                               | 1523 mm                                                                                                                                                                                                                                                                                                                                                |
| Width                                                | 1099 mm                                                                                                                                                                                                                                                                                                                                                |
| Depth                                                | 1331 mm                                                                                                                                                                                                                                                                                                                                                |
| Device warranty                                      | 2 years                                                                                                                                                                                                                                                                                                                                                |
| Delivery and installation at the customer's premises | Ask a salesperson                                                                                                                                                                                                                                                                                                                                      |
| Other device parameters                              | electrically operated backgauge control, infinitely dimmable, switchable optical cutting line with luminous LEDs, control panel with programmer and multi-touch display, automatic hydraulic clamp drive, precisely adjustable pressure force via the control panel, air nozzles for easy carrying large stacks of paper, IR light beam safety curtain |

## Gallery



Find a product on:

<https://en.opus.pl/electric-hydraulic-guillotine-ideal-the-68-lt>